

Compact Grade Laminate (CGL)

Nylon Steel Cored Rope

LLDPE Slide

Various Plastic Mouldings


- Lookout Tower •
- Slide (1.9m) •
- Climbing Wall (1.9m) •
- Rope Climb (1.9m) •
- Fireman's Pole (1.5m) •
- Side Ladder (1.5m) •
- Twisted Climbing Net (1.5m) •
- Spider's Web •
- **Inclined Hoop Bars** •

Technical Information

Equipment Dimensions		
Length / Width / Height	8.3m x 4.9m x 3.5m	
Surfacing and Area Required		
Recommended Minimum Space	11.8m x 8.8m x 4.7m	
Max Gradient of Ground	1 in 50	
Free Height of Fall	1.9m	
Impact Area	63.44m ²	
Synthetic Area (i.e. EPDM / Wet Pour / Synthetic Grass etc.)	69.65m ²	
Loosefill at 250mm (i.e. Bark / Cushionfall / Sand)	19m ³	
GrassLok Tiles	85m ²	
Installation Information	SGF	SF (if different)
Installation Time	2 Persons 21 Hours	
Overall Weight	811kg	
Heaviest Part	33kg	
Largest Part	2.4m x 0.9m x 0.6m	
Longest Part	2.4m	
Concrete Required	1.15m ³	1.75m ³
Certified to ASTM F1487		

Click here for more information & downloads

© Playdale Playgrounds Tel: 015395 31561 www.playdale.co.uk

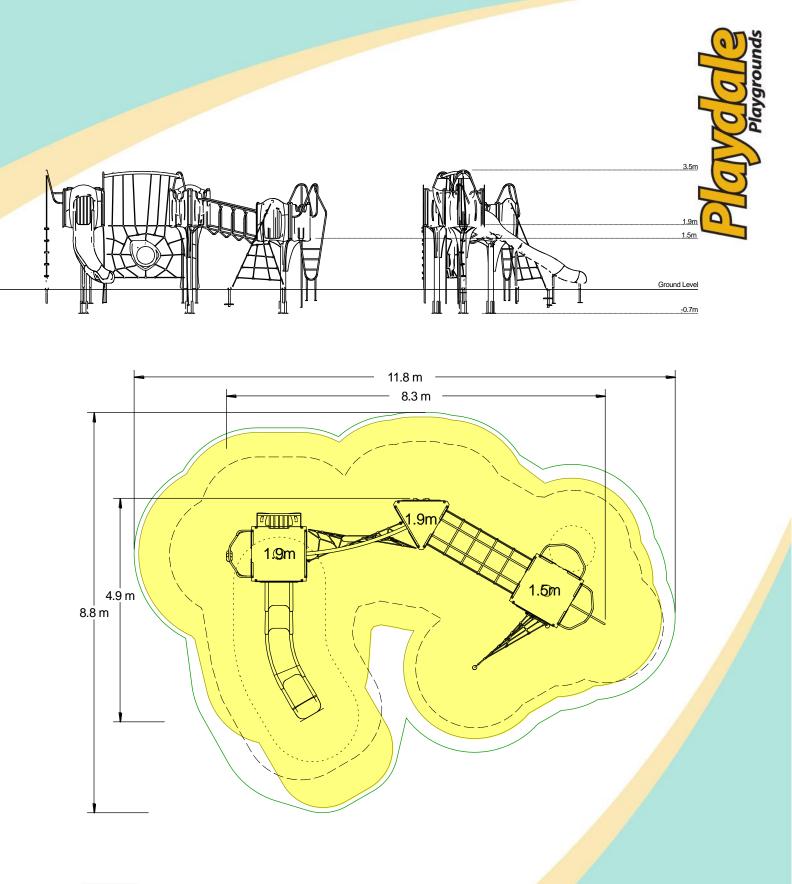

 Recommended Minimum Space
Impact Area
 Free Space
 Unit Spacing Boundary

Click here for more information & downloads

© Playdale Playgrounds Tel: 015395 31561 www.playdale.co.uk

Ŧ